

CAIXA COM TERMINAIS DE SEGURANA AUMENTADA EM POLIAMIDA






FULL PLASTIC EXPLOSION-PROOF JUNCTION BOX WITH TERMINALS

Dados t cnicos principais:

Main technical data:


Marcao: BR-Ex e II T6;
 Zonas: 1, 2, 21 e 22;
 Grau de proteo: IP66;
 Tenso: CA 690V;
 Seo do terminal/Corrente: 4mm² / 25A, 6mm² / 32A;
 Terminais: 4 x 4 ~ 6mm² + 1T 2,5mm²;
 Material da Caixa: Poliamida.

Ex mark: BR-Ex e II T6;
 Zones: 1, 2, 21 and 22;
 Degree protection: IP66;
 Rated Voltage: AC 690V;
 Cross section/Rated current: 4mm² / 25A, 6mm² / 32A;
 Terminals: 4 x 4 ~ 6mm² or 6mm² + 1PE 2,5mm²;
 Material of enclosure: Polyamide.

Ilustrao Illustration	M�todo Method	Entrada de cabos / Cable entry		C�digo Order N�. (Code)
		Prensa Cabos pl�sticos Moulded plastics cable glands	Plugue Plug	
				X52140000 □
		2 x M20	1 x M20	X52142M20 □
		2 x M25	1 x M25	X52142M25 □
		3 x M20	1 x M20	X52143M20 □
		3 x M25	1 x M25	X52143M25 □
		4 x M20		X52144M20 □
		4 x M25		X52144M25 □

Terminais / Terminals:
 4,0mm² [4]
 6,0mm² [6]

Dimens es externas em (mm):
Outline dimensions (mm):

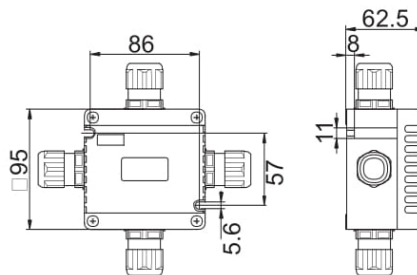

Especificaes:
Specifications:

